


TD 54-661 Page 1

**Silicon Power Transistors
 JEDEC Types 2N1015,
 2N1016**

7.5 Amperes, 150 Watts
 Collector-to-Emitter Voltage 30 to 300
 Volts

Westinghouse



Thermal Characteristics

- *Thermal resistance, θ_{JC} , °C/watt, max. .07
- Derating factor, Watts/°C 1.43
- *Typical thermal drop, case to heat sink, °C/watt. 0.3

Application

The Westinghouse 2N1015 and 2N1016 series are NPN fused silicon power transistors. These transistors are rated at a maximum collector current of 7.5 amperes, the 2N1015 series having a minimum d-c gain of 10 at 2 amperes and the 2N1016 having a minimum d-c gain of 10 at 5 amperes. Exhibiting extremely low saturation resistance and characterized by excellent operating capabilities at True Voltage Ratings and high temperatures, these transistors provide a new degree of flexibility for circuit design. The silicon power transistor is hermetically sealed in a welded case and features an all-welded internal construction, thus assuring maximum reliability and long life. The mounting stud of the single-ended case style is designed for good thermal contact to an external heat sink as well as ease of installation. Specifically designed for high-power switching, voltage and current regulators, and amplifier application in industrial and military equipments, each transistor is 100

percent tested for electrical characteristics, and in addition, each production lot is further subjected to rigid environmental testing.

All of these transistors carry the Westinghouse Lifetime Guarantee.

Guarantee

Westinghouse warrants to the original purchaser that it will correct any defect or defects in workmanship, by repair or replacement f.o.b. factory, for any silicon power semiconductor bearing this symbol \oplus ™ during the life of the equipment in which it is originally installed, provided said device is used within manufacturer's published ratings and applied in accordance with good engineering practice. This warranty shall constitute a fulfillment of all Westinghouse liabilities in respect to said products. This warranty is exclusive and in lieu of all other warranties of quality, whether written, oral, or implied (including any warranty of merchantability or fitness for purpose). Westinghouse shall not be liable for any consequential damages.

Datasheet.Worm



Maximum Ratings

① The maximum collector to emitter voltage rating is based on the maximum rated emitter dissipation of the transistor with the base emitter forward biased.
 The maximum collector to emitter voltage rating is below the various "break-down" voltages, $V_{CE(sat)}$, $V_{CE(s)}$, $V_{BE(s)}$ and the $\alpha_{min}=1$ curve in the safe operating region, $V_{CE(s)}$ (sat). Each transistor is power tested within its maximum limits of V_{CE} , I_B and I_C . (see figures 3 and 4).

Collector to emitter, V_{CE} , Vdc	2N1015	2N1016	30
Collector to base, V_{CB} , Vdc	2N1015A	2N1016A	60
Collector current, I_C , Adc	2N1015B	2N1016B	100
Base current, I_B , Adc	2N1015C	2N1016C	150
Emitter current, I_E , Adc	2N1015D	2N1016D	200
Power	2N1015E	2N1016E	250
Temperature	2N1015F	2N1016F	300
Power dissipation, P_T at $T_C=45^\circ\text{C}$, watts, max.			equal to rated V_{CE}
Junction temperature, T_J , $^\circ\text{C}$			7.5
Storage temperature, T_{stg} , $^\circ\text{C}$ min.			5.0
Storage temperature, T_{stg} , $^\circ\text{C}$ max.			7.5
Power dissipation, P_T at $T_C=45^\circ\text{C}$, watts, max.			150

Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise specified

	Symbol	Minimum	Typical	Max.	Units
2N1015/2N1016					
Collector current at $V_{CE}=V_{CE}$ (from max. ratings), $T_J=150^\circ\text{C}$, $V_{BE}=-1.5\text{ Vdc}$.	I_{CEX}	..	2	*20	mAdc
Emitter current at $V_{BE}=25\text{ Vdc}$, $I_C=0$, $T_J=150^\circ\text{C}$.	I_{EO}	..	3	*20	mAdc
Switching time, delay plus rise time.	t_d+t_r	..	3	μsec
Storage plus fall time.	t_s+t_f	..	7	μsec
2N1015					
Saturation resistance at $I_C=2\text{ Adc}$, $I_B=300\text{ mAdc}$.	$r_{CE(sat)}$..	0.25	* 0.75	ohms
Dc current gain at $V_{CE}=4\text{ Vdc}$, $I_C=2\text{ Adc}$.	β_{FE}	*10	14
Base voltage, at $I_C=2\text{ Adc}$, $I_B=300\text{ mAdc}$.	$V_{BE(sat)}$..	1.15	Vdc
Base cut-off frequency.	$f_{\beta o}$..	25	kHz
2N1016					
Saturation resistance at $I_C=5\text{ Adc}$, $I_B=750\text{ mAdc}$.	$r_{CE(sat)}$..	0.12	* 0.5	ohms
Dc current gain at $V_{CE}=4\text{ Vdc}$, $I_C=5\text{ Adc}$.	β_{FE}	*10	18
Base voltage, at $I_C=5\text{ Adc}$, $I_B=750\text{ mAdc}$.	$V_{BE(sat)}$..	1.25	Vdc
Base cut-off frequency.	$f_{\beta o}$..	30	kHz

*JEDEC registered parameters.

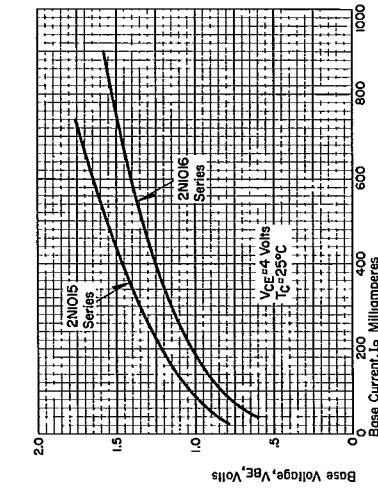


Figure 2. Input characteristics.

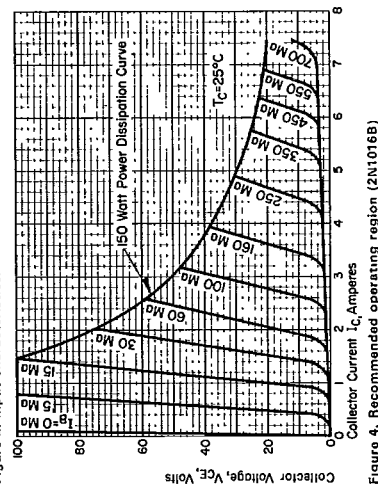


Figure 4. Recommended operating region (2N1016B).

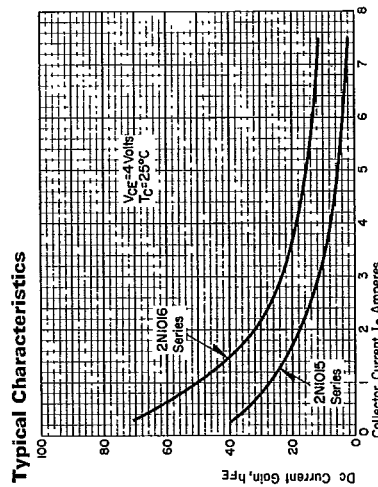


Figure 1. Dc gain versus collector current.


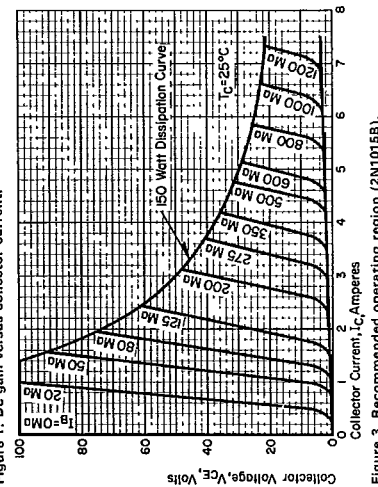


Figure 3. Recommended operating region (2N1015B).



Dimensions in Inches

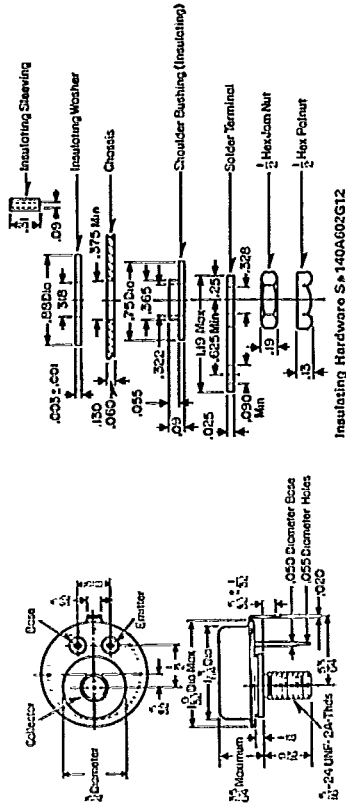

February, 1967
 Supersedes TD 54-661, pages 1 and 2, dated
 August, 1963
 E. D. C/2116/DB; E. D. C/2117

Westinghouse Electric Corporation
 Semiconductor Division, Youngwood, Pa. 15697
 Printed in USA